


1570nm DFB 2mw Coaxial Pigtail Laser Diode with SMF
1570nm Fiber Coupled LD with Single Mode Fiber (SM Fiber)

WSLP-1570-002m-9-DFB


Wavespectrum laser Group

www.wavespectrum-laser.com


PARAMETER	SYMBOL	VALUE	UNIT
LD Reverse Voltage	V_r	2.0	V
PD Operating Current	$I_{f(PD)}$	2.0	mA
PD Reverse Voltage	$V_{r(PD)}$	15	V
Operating Temperature	T_{op}	-10 ~ +85	°C
Storage Temperature	T_{stg}	-40 ~ +85	°C
Lead soldering temperature (10 sec.)	T_{is}	260	°C
Features: <ul style="list-style-type: none"> ● 1570nm ● DFB Laser Diode ● Built-in Photodiodes ● 9um SM Fiber ● Isolator Optional ● Coaxial or Receptacle Package Optional 			
Applications: <ul style="list-style-type: none"> ● Test Equipments ● Optical Transmitter of Analog Signal ● Optical Transmitter of Data Signal 			
Specifications		WSLP-1570-002m-9-DFB	
		Min	Type
Center Wavelength@25°C		+/-2nm	1570nm
Laser Type		DFB	
Output Power		----	2mW
Fiber Core		9um SM Fiber	
Threshold Current (Typ.) I_{th}		5mA	11mA
Operating Current		----	30mA
Forward Voltage		----	1.1V
Monitor Current		0.1mA	----
PD Capacitance		----	10pF
PD Dark Current		----	0.1uA
Side Mode Suppression Ration		30dB	35dB
Package Style		Coaxial (Receptacle Optional)	
Data Rate		1.25Gb/s	
Isolator		Optional	
Connector Pin		A-type (B-type Optional)	
Fiber Connector		FC	



Coaxial Package View

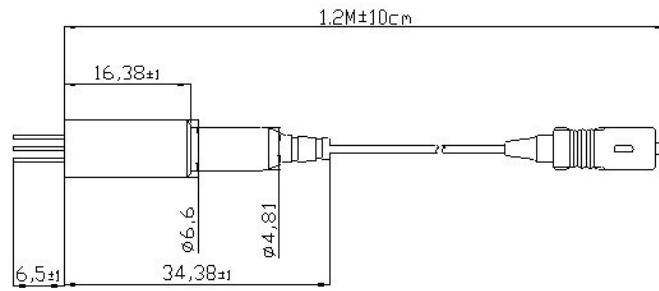

Bottom View

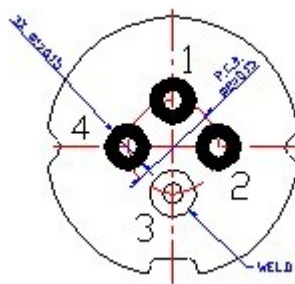

TYPE A
PIN ASSIGNMENT:

1	PD Cathode
2	PD Anode
3	LD Anode, GND
4	LD Cathode

Electrically shorten LD module and store in non-extreme conditions.
Suggest using the constant current power supply.



Wavespectrum Laser, Inc.
www.wavespectrum-laser.com
wavespectrumlaser@gmail.com

